


BBA auto prime contractor pumps



Type: BA-C 200H42 D533 VO GL
8" diesel driven in a sound absorbing canopy

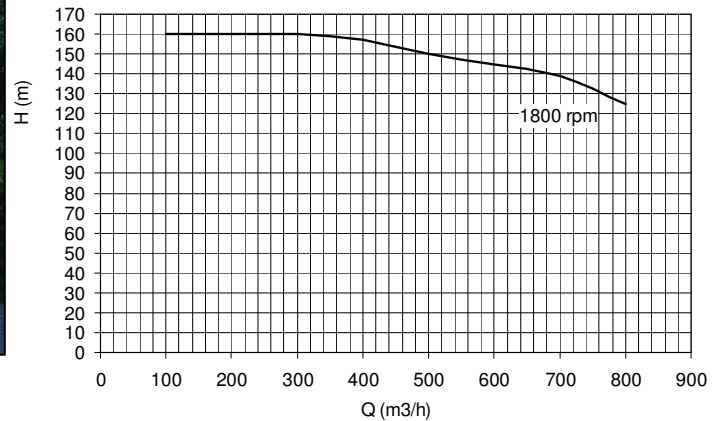

General:

The BBA auto prime contractor pump BA-C200 H42 is a high robust dieselmotor pumpset with a flow capacity up to 800 m³/h, total head up to 160 m and solid handling of 50 mm. It combines an extremely high efficient centrifugal pump and state-of-the-art dieselmotorpump design. The reliable and simple operated BBA vacuum pump with mechanic float box enables a suction lift up to 8 m. The patented Cyclo-seal system makes the pump suitable for continuous use even in intermediate flow situations. The diesel driven BA-C pump in a sound absorbing canopy results in a noise level of 60 dBa at 10m.

Suitable to operate even in residential areas. With the **E-slide®** system the pump unit can easily be moved out of the canopy for quick inspection or maintenance purposes. The high efficient BA-C pumps fully meet today's requirements on low energy and maintenance costs.

Applications:

This multi purpose pump system is used for general construction, site-dewatering and as an emergency pump.

Technical specifications:

Centrifugal pump:

impeller type : closed impeller
 flow max : 800 m³/h
 head max : 160 m
 impeller size : 533 mm
 free passage : 50 mm
 req. power : 367 kW
 pump speed : 1800 rpm
 max speed : 1800 rpm
 connections : suction DN 250
 : discharge DN 150

Materials:

pump casing : cast iron GGG 70
 impeller : bronze
 pump shaft : steel SAE 1144
 shaft seal : mechanical seal
 seal faces : tungsten carbide /
 silicium carbide
 O ring : Viton

Vacuum pump:

pump type : diaphragm
 air capacity : 50 m³/h
 max vacuum : 8 m
 drive : tooth-belt driven

Materials:

diaphragm : NBR
 valves : NBR
 float box : aluminium coated
 floater : stainless steel 1.4301
 non return valve : cast iron GG 25

BBA auto prime contractor pumps



Type: BA-C 200H42 D533 VO GL

8" diesel driven in a sound absorbing canopy

Diesel drive:

diesel motor : Volvo TAD1643VE
cooling : air to air intercooling
cylinder : 6 cylinder
motor power : 400 kW at 1800 rpm
start : electric 12 V incl. hour counter
fuel tank : 300 liter
assembly : pump outside on a frame,
engine in a galvanized
canopy, lockable doors,
oil-water separator
noise level : 60 dBA at 10 m

Dimensions:

l x w x h : 6060 x 2450 x 2600 mm



Optional:

auto level control:


automatic start-stop device
with two float switches
auto-O-manual, incl. hour counter




Standard:

Cycloseal ®

The cycloseal creates a Cyclo-action, which removes materials from the seal area, extending seal life and eliminating any need for venting or water flushing

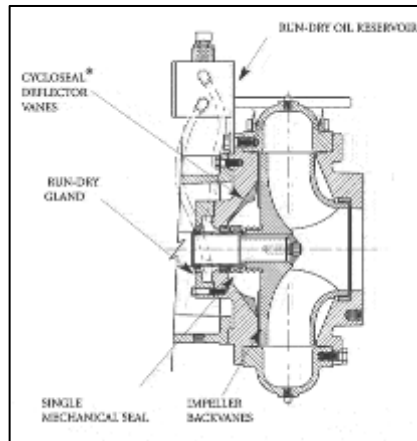

Working principle:

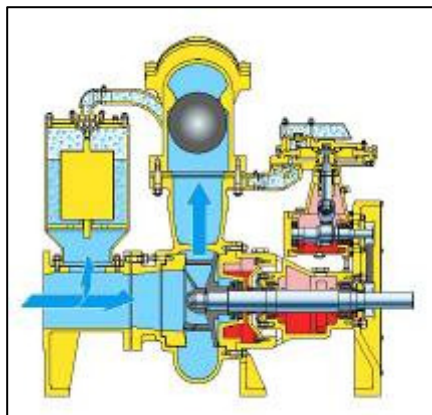

The vacuum diaphragm pump primes the air from the suction side. A non return valve in the discharge side prevents priming from this side. As soon as the water is primed, the floater closes the connection to the vacuum pump. The highly efficient centrifugal pump starts pumping.

BBA Pumps BV
Edisonstraat 12, 7006 RD
P.O. Box 498, 7000 AL
Doetinchem

Pumps for results
Tel. (+31) 314 36 84 36
Fax. (+31) 314 37 84 03

www.bbapumps.com
info@bbapumps.com

Pomptype / Pumpentyp / Pump type

: BA-C 200H42D533

Toerental / Drehzahl / Speed

: 1800rpm

Waaier / Laufrad / Impeller

: 533mm

Slijtplaat / Verschleissplatte / Wear plate

: -

Vrije doorlaat / Freier Durchgang / Free passage





: 50mm

Zuig / Saug / Suction

: DN250

Pers / Druck / Discharge

: DN150

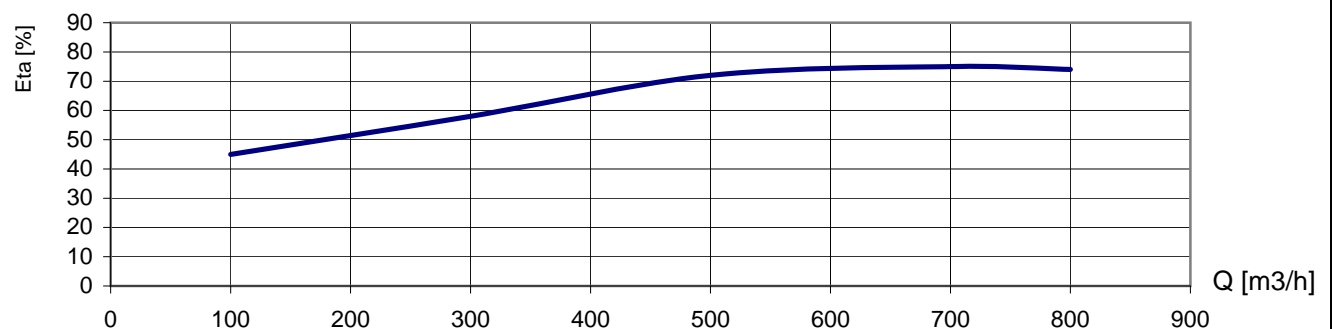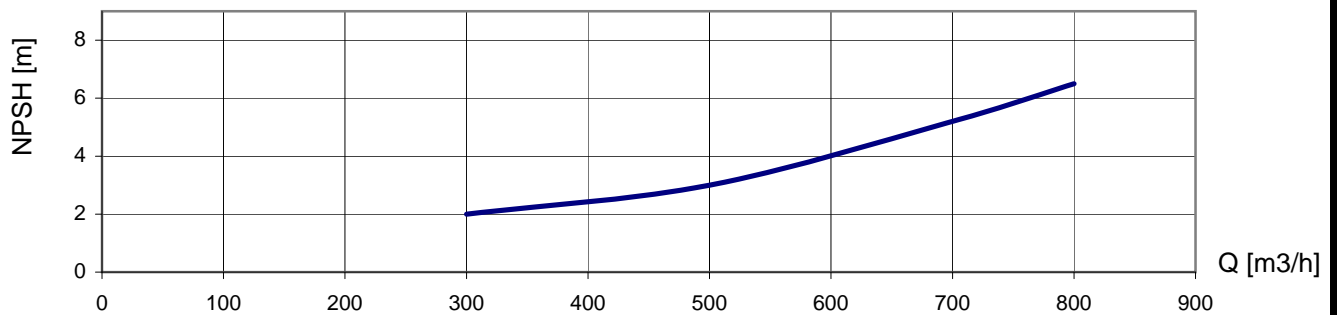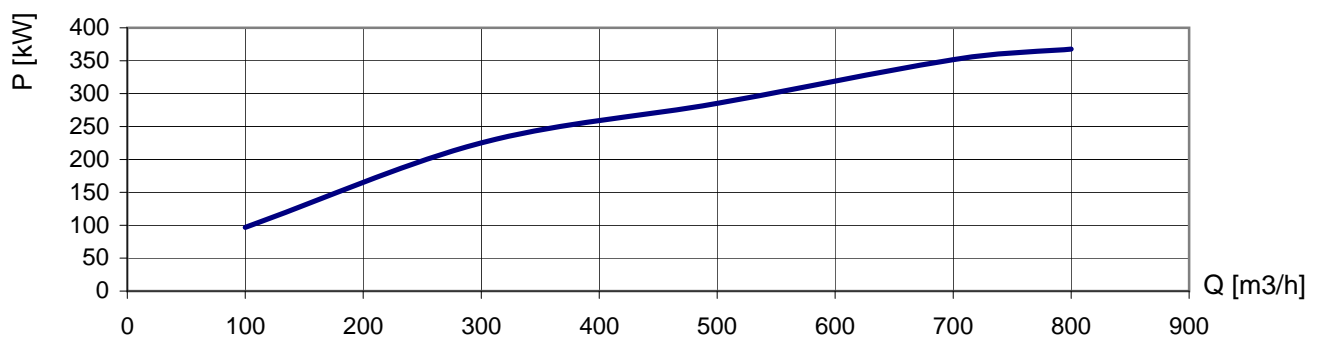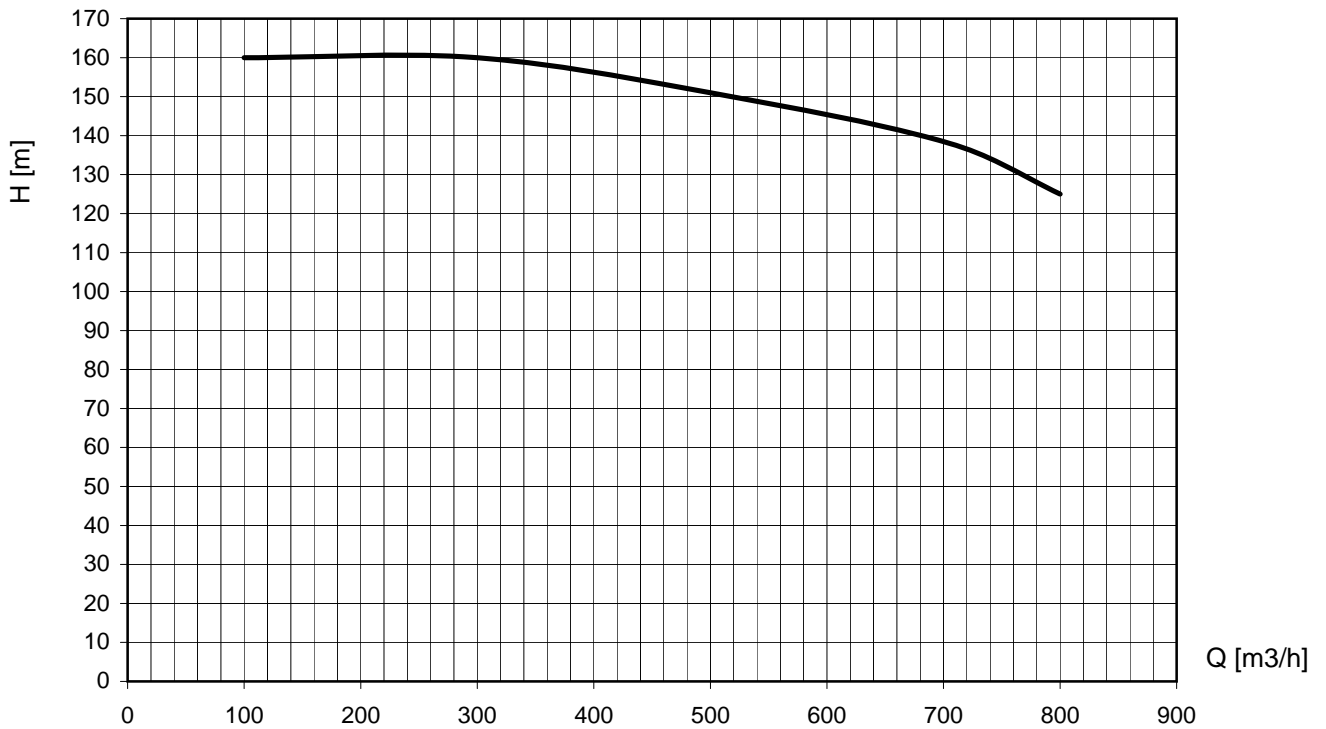

Pomptype / Pumpentyp / Pump type

: BA-C 200H42D533

Toerental / Drehzahl / Speed

: 1800rpm

Waaier / Laufrad / Impeller

: 533mm / 21"

Slijtplaat / Verschleissplatte / Wear plate

: -

Vrije doorlaat / Freier Durchgang / Free passage

: 50mm / 2"

Zuig / Saug / Suction

: DN250

Pers / Druck / Discharge

: DN150

