BA150KS Electrically Driven
Sewage and Trash Pump
Max. 400 m^3/hour, Max. 27 mwc

Pump specifications:

Type	BA150KS D285
Max. flow	400 m^3/hour (1760 US gpm)
Max. pressure	27 mwc (89 ft.)
Solids handling	100 mm (4")
Impeller type	Screw channel impeller
Priming system	BBA MP50
Electric motor	22 kW | 4 pole | 400/690V
Motor control	Frequency drive
Display	HMI touchscreen
Canopy	L10-23
Connections	DN150 (6")
Dry weight	Approx. 1500 kg

FEATURES

BA auto prime pump
The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring the 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

World-class performance
The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and electric motors, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of “Lowest cost of ownership”.

Electric pumps in canopy
- Extremely low noise level
- Maximum safety while running
- Better resistant to vandalism
- More space for your branding
- Optimal weather protection
- Minimal ageing, therefore stable in value

Complete package designed & built by BBA Pumps
- Complete in-house design & production
- Over 70 years of experience in the market
- Extensive testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available

After sales service & product support
- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing
- Extensive training options available (technical & commercial), on-site or in-house

Stackable frame BF10-23 is optional

PERFORMANCE CURVES

Continuous duty according to ISO 9906

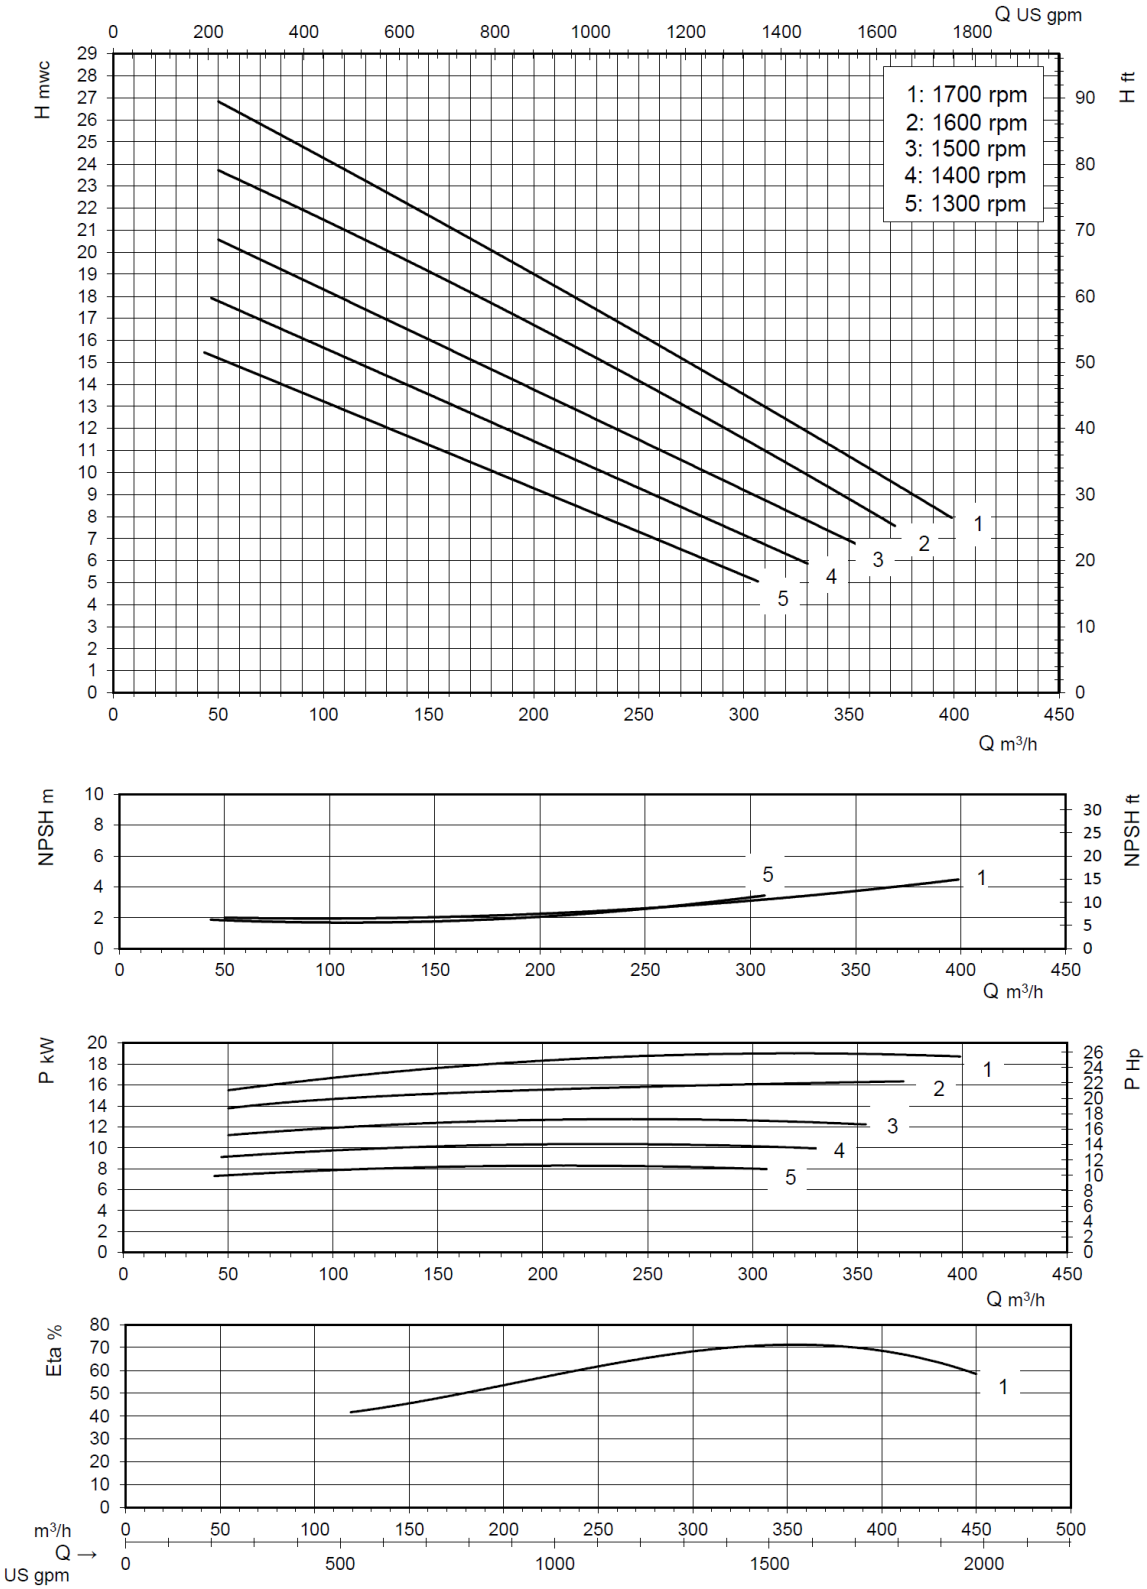

PUMPS FROM HOLLAND

STANDARD TECHNICAL SPECIFICATIONS

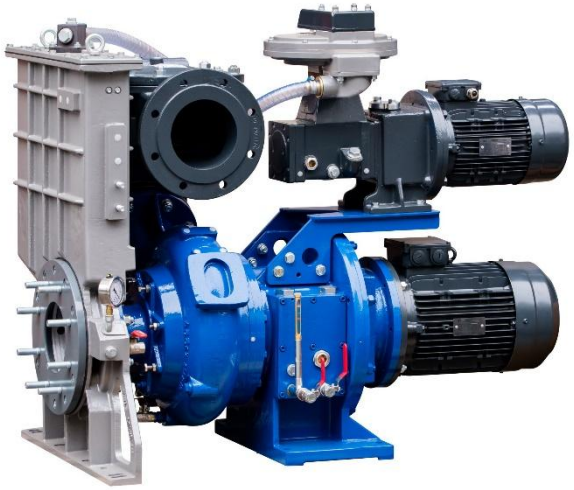

BBA Pumps auto prime pump

Pump type	BA150KS D285
Max. flow	400 m³/hour (1760 US gpm)
Max. head	27 mwc (89 feet)
Impeller type	Screw channel impeller
Solids handling	100 mm (4 inch)
Pump casing	Cast iron GG25
Impeller w/ cutter slots	Chrome Moly 42CrMo4
Suction piece	Chrome Moly 42CrMo4
Backplate w/ cutting edges	GG25
Pump shaft	42CrMo4 heat treated
Shaft seal	Mechanical seal
Seal faces	Tung/Sic
Seal rubber	Viton

BBA Pumps priming system

Pump type	MP50 diaphragm pump
Air handling capacity	50 m³/h (30 cfm)
Max. vacuum	8,5 m (25 inHg)
Drive	Electric motor 2,2 kW - 400V
Start/stop	Fully automatic
Float box	Aluminium
Non return valve	Cast iron GG25
Check valve disc	Buna-N

Electric motor

Motor brand	Hoyer
Motor type	HMC3 180L-4
Power kW (Hp)	22 kW (30 Hp)
Rated Voltage	400/690V 50Hz
Current (I nom.)	38,5 Amp
4-pole	1470 RPM
Efficiency	92 %
Protection class	IP55
Thermal protection	PTC
Standard	IEC 60034

BBA Pumps control panel

Touchscreen	HMI Human-Machine Interface
Frequency drive	For variable speed and energy saving
Automatic level control	Start/stop with two float switches
PID control	Level sensor is optional
Languages	Dutch | German | English
Configuration portal	For managing specific functions for users
Actual information	Hour counter, malfunctions, required kWh

All electrical components **safe** and **dry** behind a lockable door.

PUMPS FROM HOLLAND

Screw channel impeller
This special designed closed screw impeller is a real waste warrior. Even at higher speed, or with pumping air bubbles, the pump runs vibration-free. The best choice for your sewer bypass jobs.

Large inspection covers
Easy access to float box, impeller and non-return valve.

Easy inspection
Oil glasses, drain valves and fill plugs are all easily accessible.

Priming system
Diaphragm pump, air-cooled, water-resistant and oil-spillage free. Air capacity of 50 m^3 per hour.

Level sensor is optional
The level sensor, in combination with the built-in PID control, ensures accurate level control and reduces energy consumption.

4 Year limited warranty
The BBA Pumps limited warranty covers years or operating hours whichever occurs first. For more details, please consult the warranty book.

Pictures used are for illustration purposes only.

PUMPS FROM HOLLAND